

2" EXTRUDED ALUMINUM LOUVER

TYPE: L230



STANDARD CONSTRUCTION

Depth: 2 Inches
 Frame Thickness: 0.081" 6063-T5 Extruded Aluminium
 Blade Thickness: 0.081" 6063-T5 Extruded Aluminium
 Blade Centers: 3-1/4" (+/- 1/4")
 Blade Angle: 38°
 Minimum Panel Size: 12" x 8"
 Maximum Panel Size: 96" x 144"
 Standard Finish: Mill Aluminum
 Stand. Bird Screen: 3/4" x 0.51" Flattened Expanded Alum.
 Free Area of 48"x48" Unit: 9.46 sq. ft. free area
 Free Area Percentage: 59.1 Percent
 Static pressure @ 700 f=FPM Exhaust: 0.08" W.G
 Static pressure @ 700 f=FPM Intake: 0.06" W.G

OPTIONAL FEATURES

- Bird Screen:** 1/4" x 1/4" inter crimped Aluminum
 1/2" x 1/2" inter crimped Aluminum
- Insect Screen:** 18" x 16" mesh, .011" diameter Alum. Wire
- Finish:** Clear Anodized
 Integral Anodized
 Baked Powder Coat. RAL # _____
- Accessories:** Filter Racks
 Security Bars
 Stainless Steel Screws
 Aluminum Blank Off Panel
 Custom Geometric Shapes
 1" or 2" Insulated Black Off Panel
 Extended Sills, Extended Sleeves

PROJECT
LOCATION
ARCHITECT
ENGINEER
CONTRACTOR

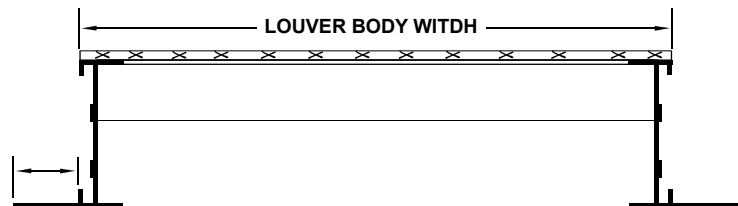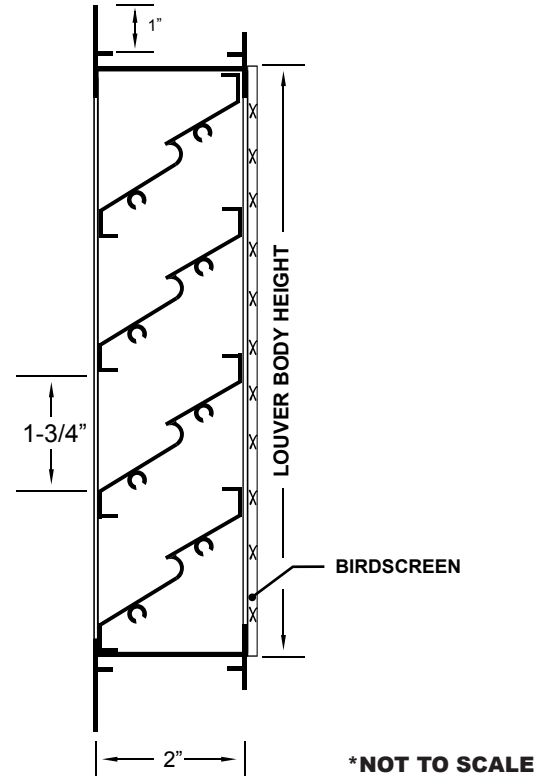

** Louver will be fabricated 1/4" smaller than opening size unless otherwise specified.*

TAG	QTY.	OPENING SIZE		NOTE
		WIDTH	HEIGHT	

Please be advised that the purpose of this submittal is to exhibit the overall dimensions of this product. Pictures nor drawings do not give entire detail of product and are not portrayed to scale. Atlantic Fabrication & Coatings reserves the right to alter this submittal without notification.



Atlantic Fabrications & Coatings • 72 Putnam Street • Paterson, NJ 07524 • 201-340-4125

WWW.ATLANTICFABRICATION.COM

L230.4.17-S