

4" DRAINABLE LOUVER

TYPE: L430

STANDARD CONSTRUCTION

Depth: 4 Inches
 Frame Thickness: 0.075" 6063-T5 Extruded Aluminium.
 Blade Thickness: 0.075" 6063-T5 Extruded Aluminium.
 Blade Centres: 3-1/2" (+/- 1/4")
 Blade Angle: 35°
 Minimum Panel Size: 12" x 12"
 Maximum Panel Size: 72" x 120"
 Standard Finish: Mill Aluminum
 Free Area of 48"x48" Unit: 9.46 sq. ft. free area.
 Free Area Percentage: 59.1 Percent
 Static pressure @ 700 f=FPM Exhaust: 0.08" W.G
 Static pressure @ 700 f=FPM Intake: 0.06" W.G
 Point of Water Penetration At: 0.01 Oz/Ft² (free area) 1058 FPM

OPTIONAL FEATURES

Bird Screens: 3/4" x 0.52" Flattened Expanded Alum. (STD)
 1/4" x 1/4" inter crimped Aluminum.
 1/2" x 1/2" inter crimped Aluminum.



Insect Screen: 18" x 16" mesh, .011" diameter Alum. Wire

Flange Options: 1-1/2", 2" & 3" (FL.)

Finish: Clear Anodized
 Integral Anodized
 Baked Powder Coat. RAL # _____

Accessories: Filter Track
 Security Bars
 Stainless Steel Screws
 Aluminum Blank Off Panel
 Custom Geometric Shapes
 1" or 2" Insulated Blank-off Panel
 Extended Sill.

PROJECT
LOCATION
ARCHITECT
ENGINEER
CONTRACTOR

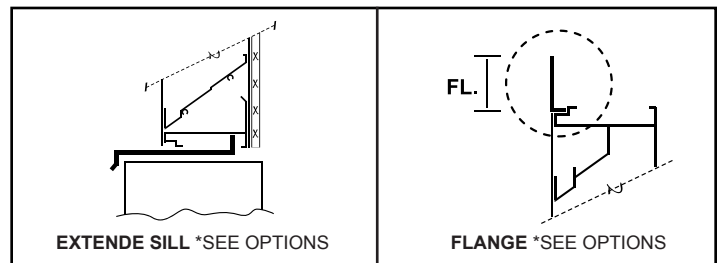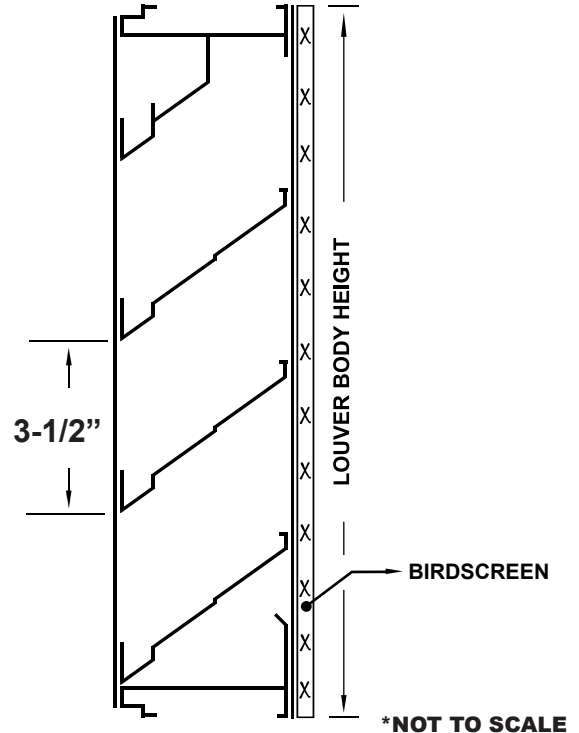

** Louver will be fabricated 1/4" smaller than opening size unless otherwise specified.*

TAG	QTY.	OPENING SIZE		FL.	NOTE
		WIDTH	HEIGHT		

Please be advised that the purpose of this submittal is to exhibit the overall dimensions of this product. Pictures nor drawings do not give entire detail of product and are not portrayed to scale. Atlantic Fabrication & Coatings reserves the right to alter this submittal without notification.



Atlantic Fabrications & Coatings • 72 Putnam Street • Paterson, NJ 07524 • 201-340-4125

WWW.ATLANTICFABRICATION.COM

L430.4.17-S